
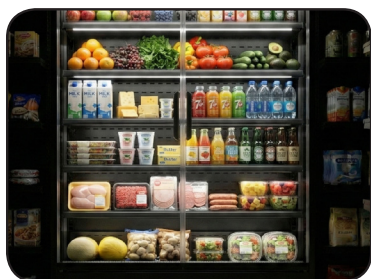


Model:
XMD2500-MK2-K

Panoramic frameless glass door multideck
10 x 1248mm shelves, undershelf LED lighting

General Information

The Future of Professional Display. The XMD Series is the definitive solution for high-end retail environments where product presentation and energy conservation are equally critical. Engineered from the ground up to maximise the 'merchandising window,' these units feature panoramic frameless glass doors and end walls, providing an unobstructed view of your produce from every angle. By combining advanced double-glazed Low-E glass with high-efficiency R290 refrigeration, the XMD Series delivers a striking professional aesthetic while reducing energy consumption by up to 50% compared to traditional open-fronted systems.

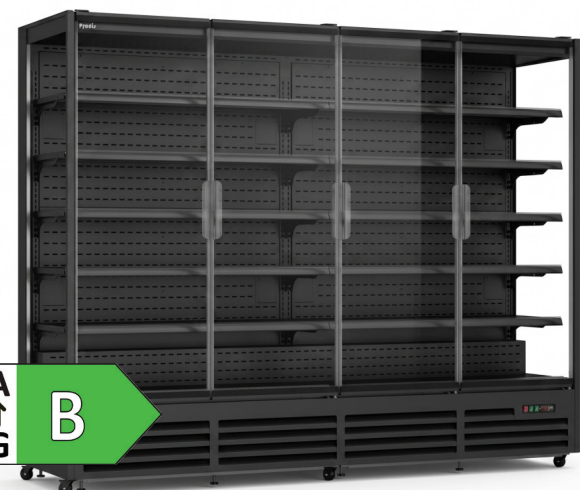


Key Features

- -1°C to +5°C (3M1) temp. range
- Forced air refrigeration
- 10 x 450mm deep adjustable height and angle shelves
- 330mm base shelf
- 1248mm shelf width
- (10) shelf edge ticket strips
- Under shelf LED lighting
- 1292/764 litre (gross/net) volume
- 5.00m² display area
- Self closing double glazed frameless doors with Low E treatment
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

Construction

- Castors as standard
- Painted steel construction
- RAL9005 Jet Black Interior and exterior
- 30mm panoramic Low E glazed end panel
- Slide out low maintenance condensing unit
- Steel front grill secured with neodymium magnets

Energy Label

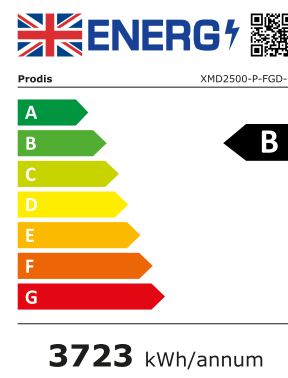

 **5.13** m²  5°C
-1°C

Technical Data	
Model	XMD2500-MK2-K
Color	Jet Black RAL9005
End panel	Panoramic Low E glass 30mm
Door style	Frameless double glazed
Door handle	'L' shaped, frosted
Cabinet construction	Painted steel
Cabinet dimensions	2560 x 740 x 2084 (w,d,h mm)
End panel dimensions	30 x 740 x 2010 (w,d,h mm)
Shelf dimensions	1248 x 450mm
Base dimensions	2500 x 330mm
Usable height	1540mm
Number of shelves	10 + base
Shelf angle adjustment	0° / 7° / 14°
Shelf edge ticket strips	10
Lighting	Under shelf LED (10) + top LED
Doors	4 (3 right hand, 1 left hand)
Glass	Double glazed Low E
Controller	Digital with light switch
Door dimensions	611 x 20 x 1653 (w,d,h mm)
Packaged dimensions	2590 x 767 x 2120 (w,d,h mm)
Net weight	440kg
Gross weight	500kg
Gross volume	2585 litres
Net volume	1529 litres
Total display area	5.00m ²
System type	Plug-in
Temperature range	-1°C to +5°C 3M1
Climate class	3 (25°C; 60%RH)
Refrigerant	R290
Refrigerant charge	2 x 149 gram
Compressors	2
Evaporator fans	4
Condenser fans	4
Noise level	≤58 dB
Energy consumption	10.2 kWh / 24h
Rated power	1060 W
Voltage	220V / 50Hz
Fuse requirements	2 x13amp



Approvals	Available At	Document #